

# MULTICOM LITE

## Multi Family Intercom

- Multicom Lite - 4G LTE capable, GSM multi-apartment intercom.
- Display up to 30 families on the illuminated directory screen.
- Up to 100 family direct dialling from the keypad.
- 300 maximum Caller ID numbers (not including visitor CID).
- Do not disturb feature.
- FOTA – Upgrade firmware via SMS.



Programmable with the AES PRO APP.

Works with our multi network AESIM.  
aesglobaltelecom.com



DETAILS			
Dial Out Numbers per Apartment	3 per apartment (300 Total)	Relays	2
Keypad Codes per Apartment (6 digit)	1 per apartment (100 Total)	Relay Type	N/C and N/O
Prox Cards/Tags per Apartment	3 per apartment (300 Total)	Relay Load	2 amps, 24v ac max
Automatic Trigger Events per Week	10	Power Consumption	300mA on dial out, 2amp peak demand
Modem Models	4G EU, 4G USA, 4G AUS/NZ	Power Supply	24v dc (24v dc 2A adaptor included)


VISITOR CODES/CARDS			
	Permanent	Time-restricted	Temporary
Prox Cards	250	250	50
Keypad Codes (4 digits)			
Caller ID			

The Multicom Lite is available in a sleek imperial style panel or flush. The illuminated information window (can hold up to 30 names or instructions if preferred).

Each kit contains, a speech panel, power supply, install manual, sim card options and a high gain antenna. Plus card/tags for handy prox access.



**MULTI-LITE-IBPK-EU**

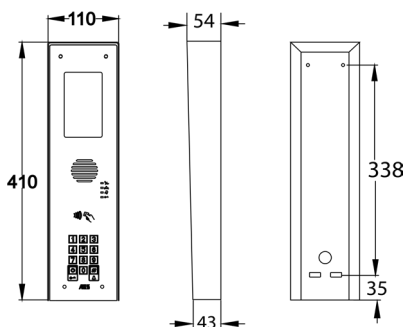

**MULTI-LITE-FBPK-EU (Flush)**

Now in a sleek modular unit.

